

FIG. 1

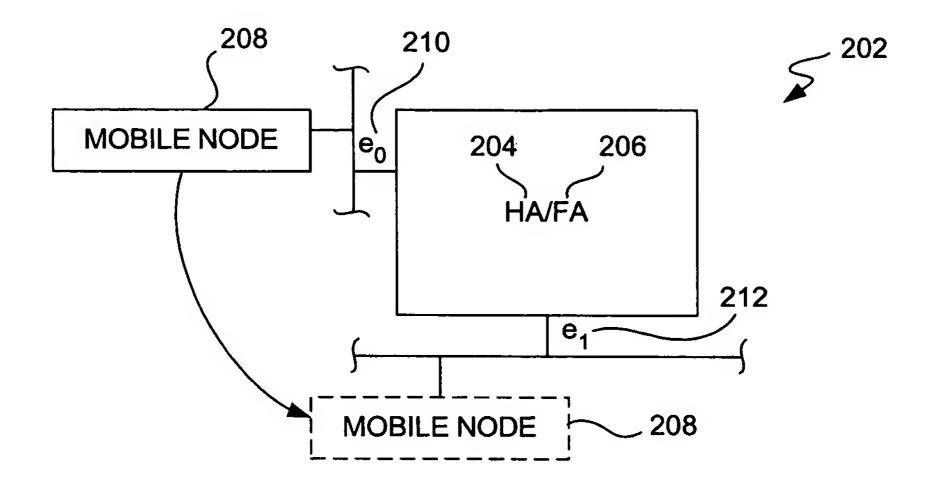


FIG. 2

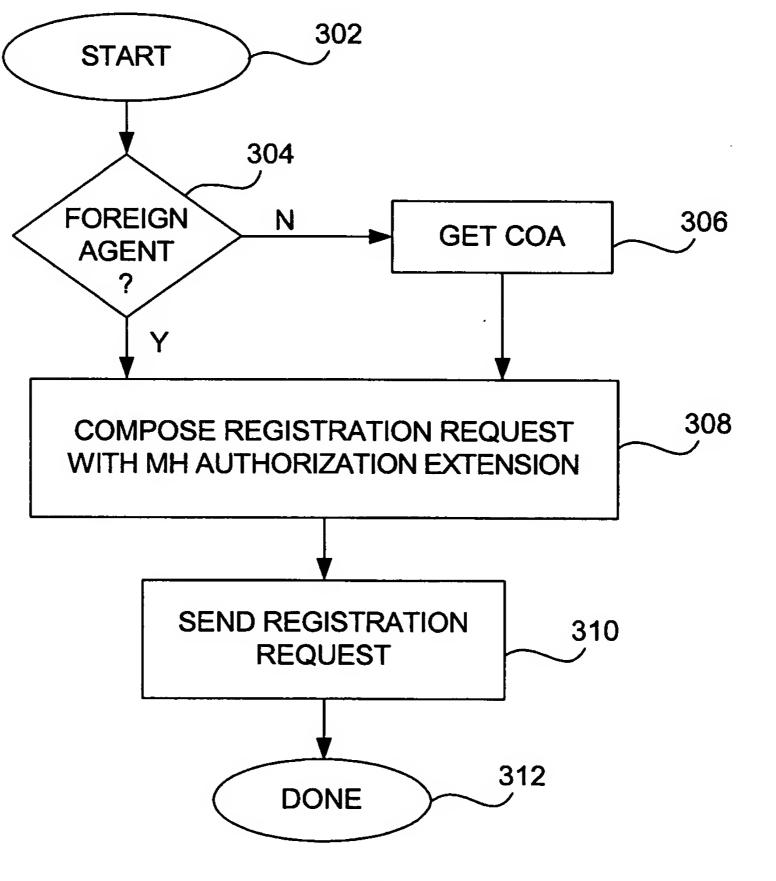


FIG. 3

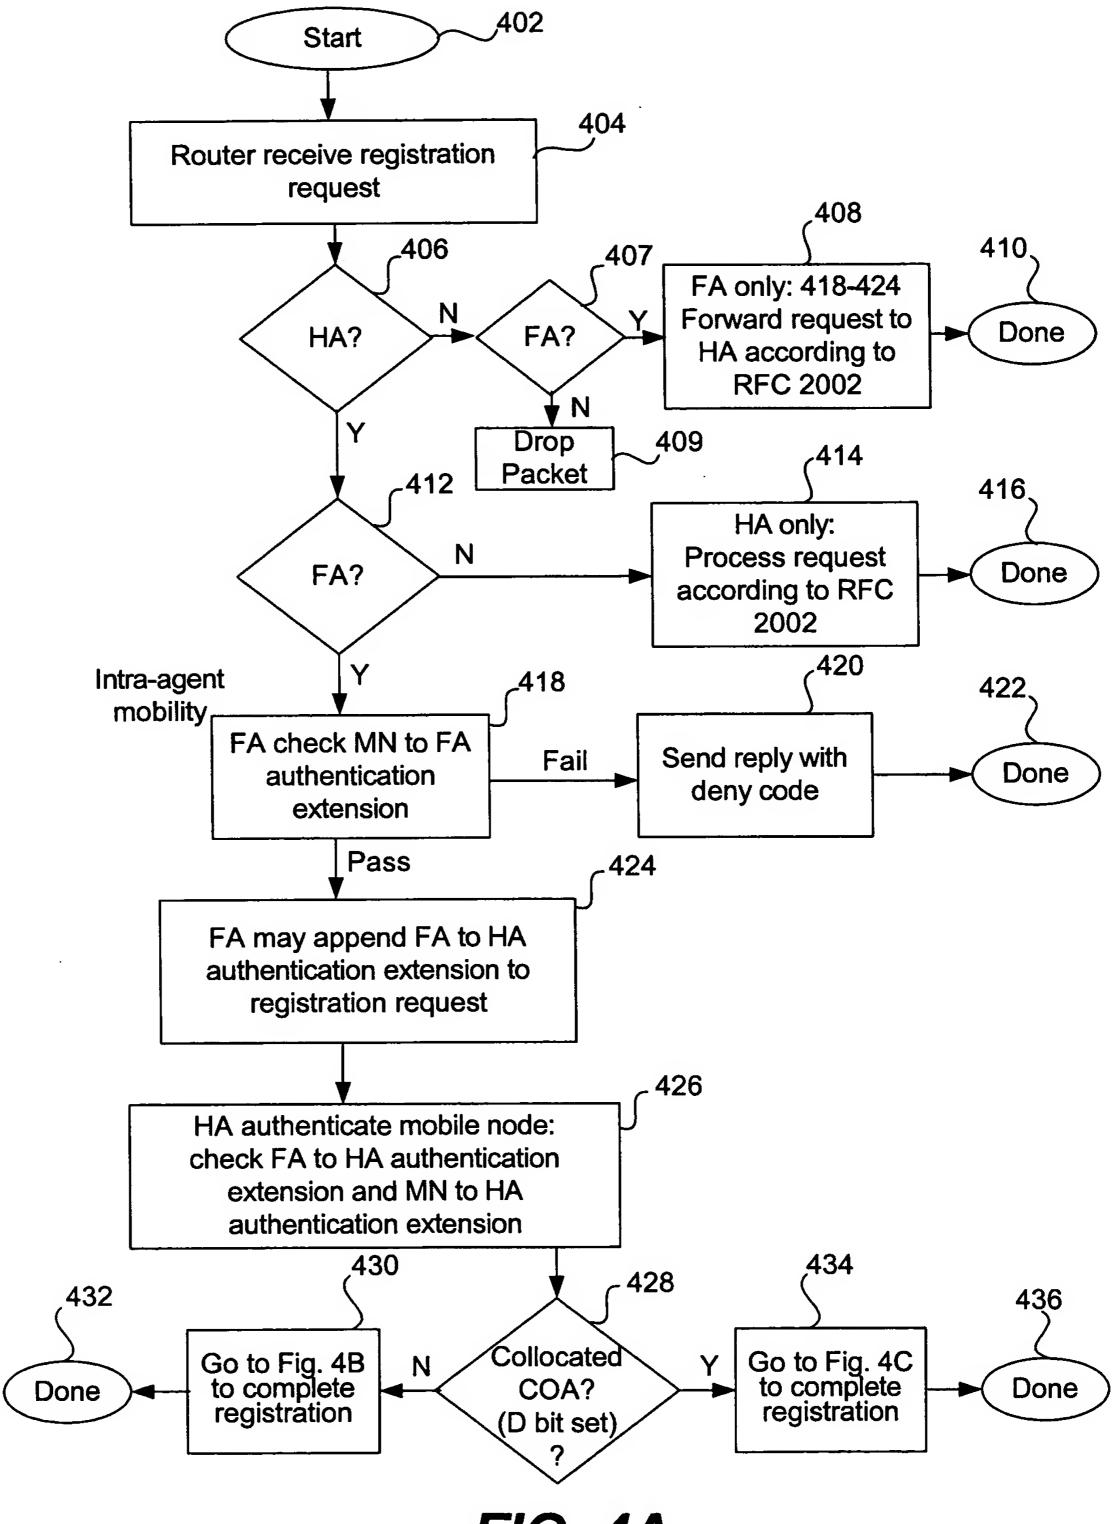


FIG. 4A

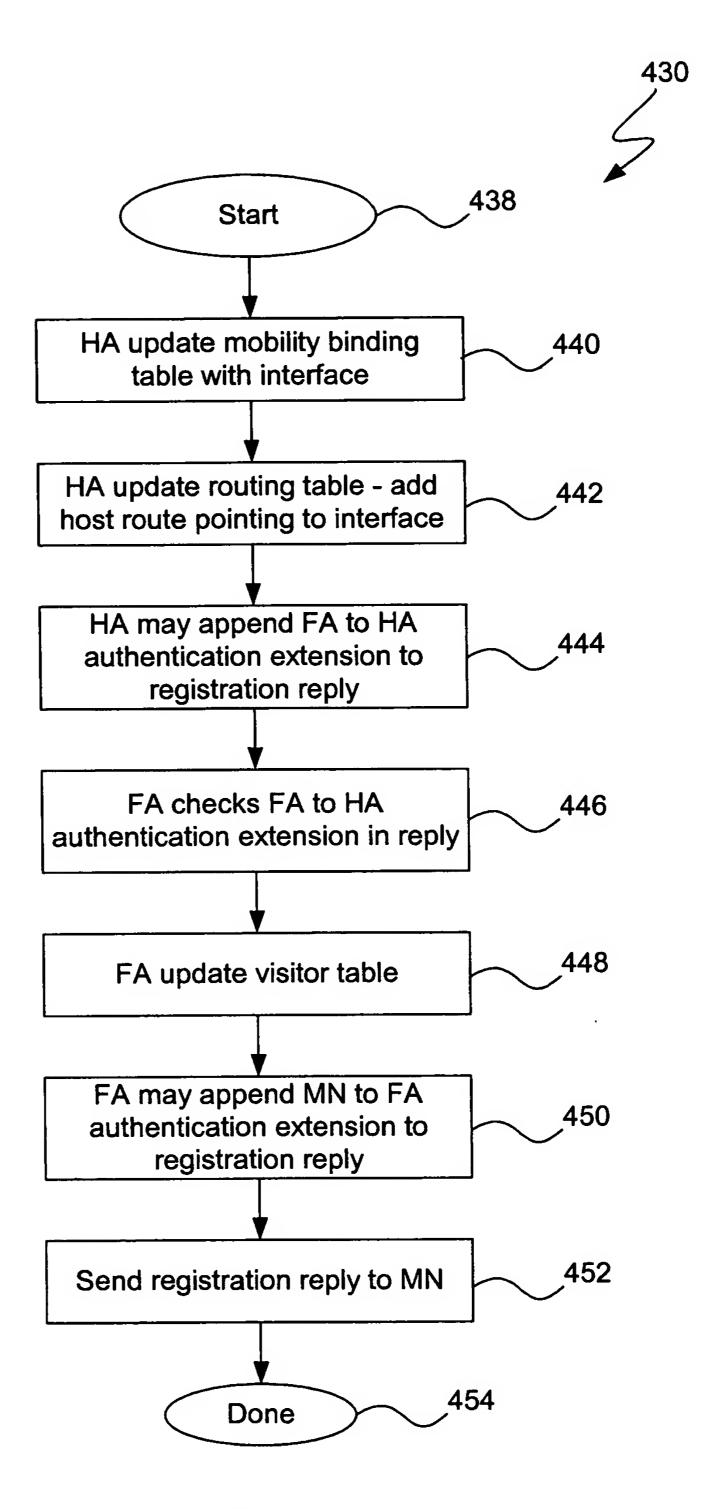


FIG. 4B

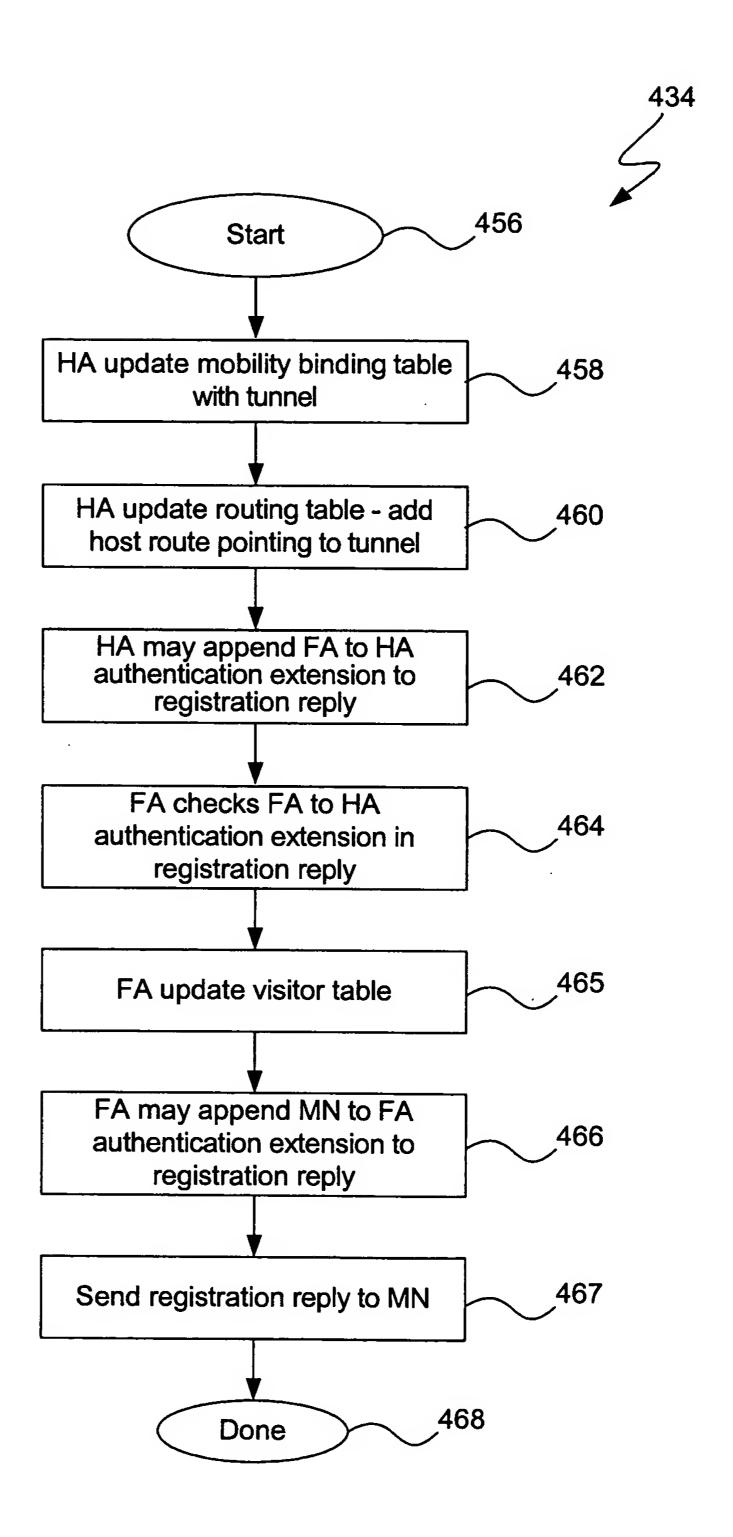


FIG. 4C

		204				530			540				542			
502	IP Header [RFC 791]					UDP Header [RFC 768]		Fixed-Length Portion of Registration Request [RFC 2002]						Mobile-Home Authentication Extension [RFC 2002]	(Mandatory)	
	Total Length 512	Fragment Offset 518	Header Checksum 524	526	<u>528</u>	Destination Port = 434 534	Checksum 538	Lifetime 558	ess <u>560</u>	<u>562</u>	<u>564</u>	266				
516		Flags	-	Source Address	Destination Address	Source Port 532	Length 536	542 Type = 1 S B D M G V rsv - 556	Mobile Node's Home Address	544-554 Home Agent Address	Care-of Address	Identification				
510 522	Type of Service	- entification	Protocol = UDP													İ
208	H															
206	Vers = 4		Time to Live													
		C C	075													

FIG. 5

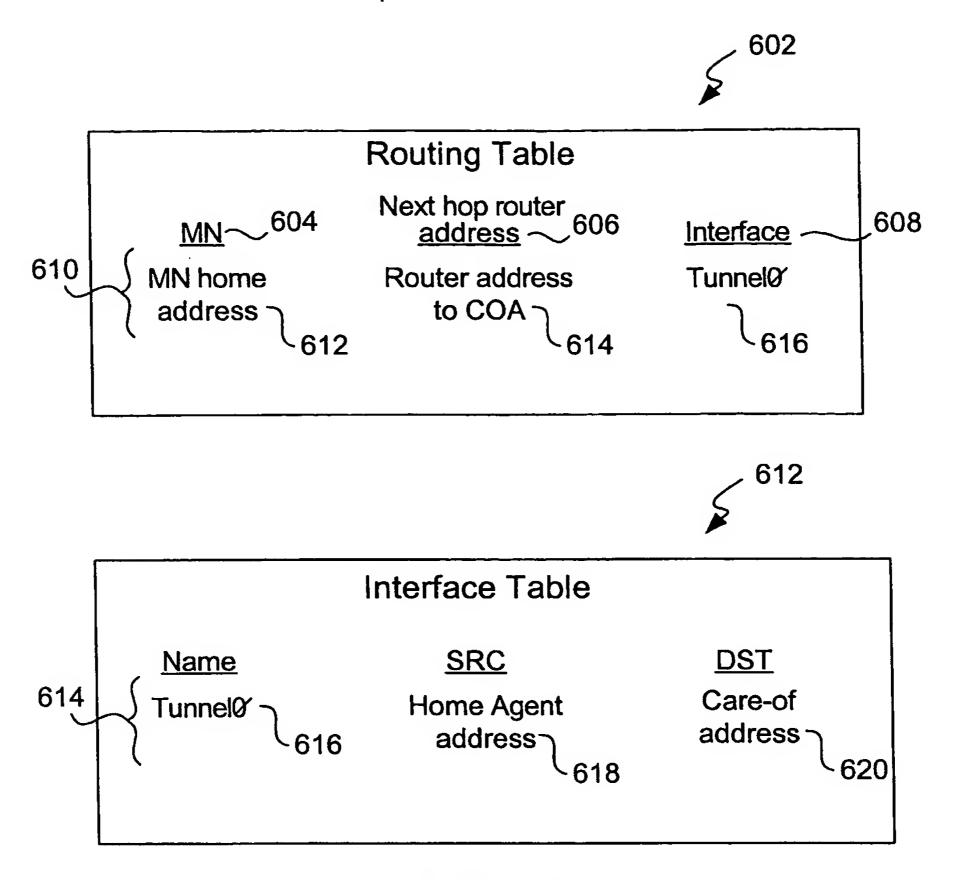


FIG. 6A


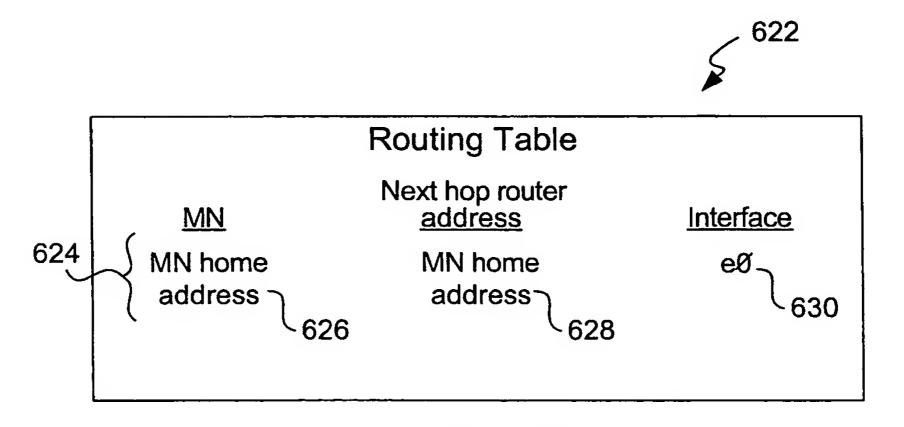


FIG. 6B

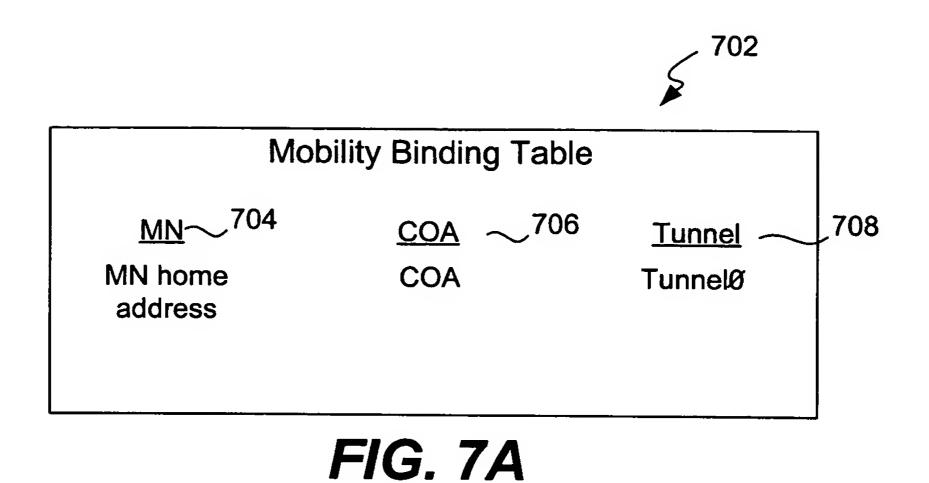

MN ∼ 712 COA ∼ 714 Interface 716

MN home COA eØ address

FIG. 7B

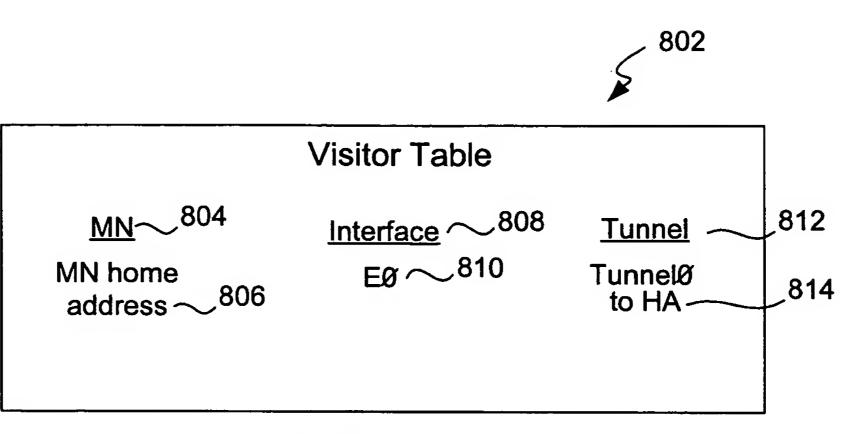


FIG. 8A


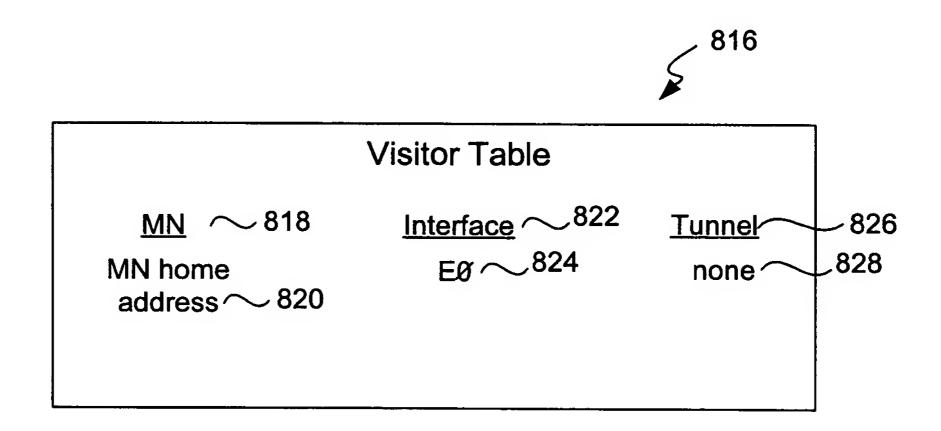


FIG. 8B

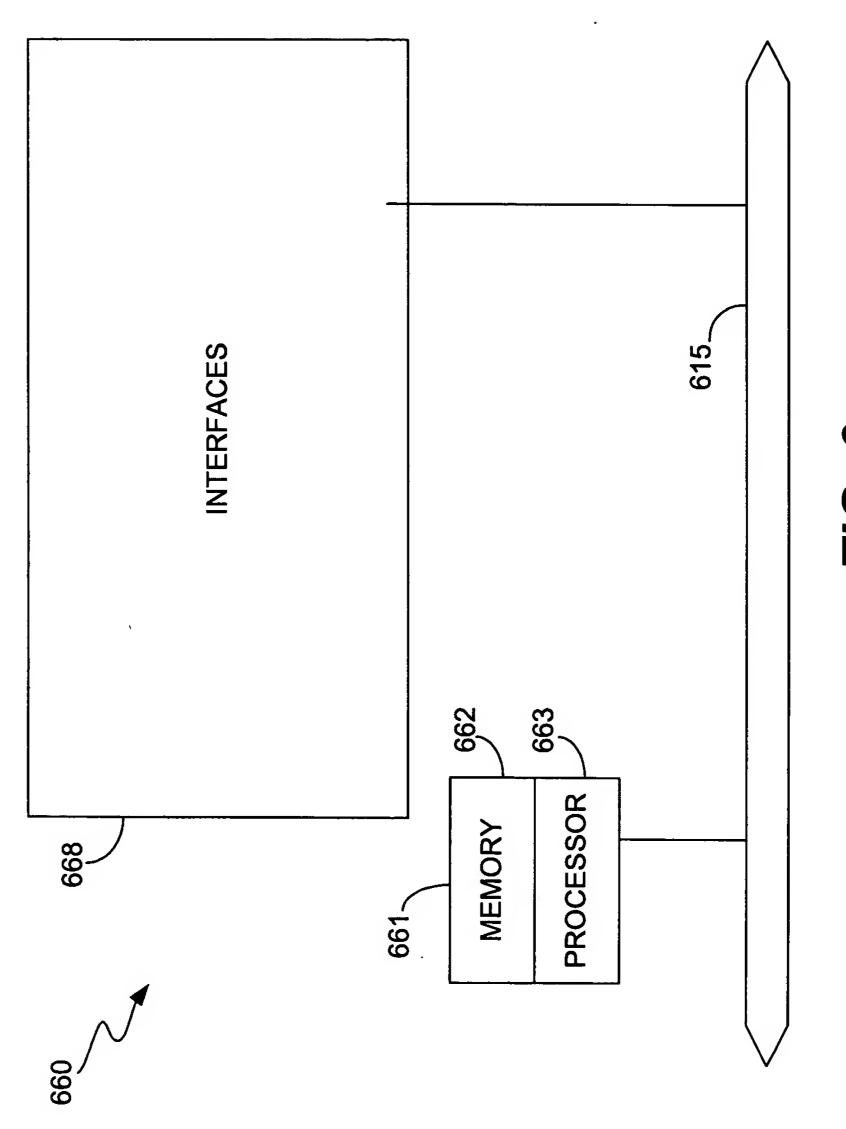

F/G. 9